

# Factsheet PORT 1.1W wall-mount



## Technical Details

Physical Dimensions (WxHxD)	126.5 x 284 x 77 mm (4.98 x 11.18 x 3.03 inch)
Mounting Height	964 mm (37.95 inch) to lower edge
Screen	7" Display, 480 x 800 pixel, touch panel
Energy Consumption	max. 5 W per PORT
Standby Mode	yes, due to proximity sensor
Supply	24-48 VDC or PoE (IEEE 802.3af)
Card Reader Frequency	13.56 MHz
Card Reader Protocols	ISO14443A, ISO14443B-2B, ISO14443B-3B, ISO15693
Standard Card Types	Mifare Classic, Mifare 1K, Mifare 4K (all other cards have to be pre-qualified by our test service center before use!)
Range of Application	temperature: 0 to 60 °C (14 to 140 °F) humidity: 0 to 90% non-condensing protection rating IP31 for internal use only

# PORT 1.1W wall-mount




Silver grey



Pearl white



Black matt

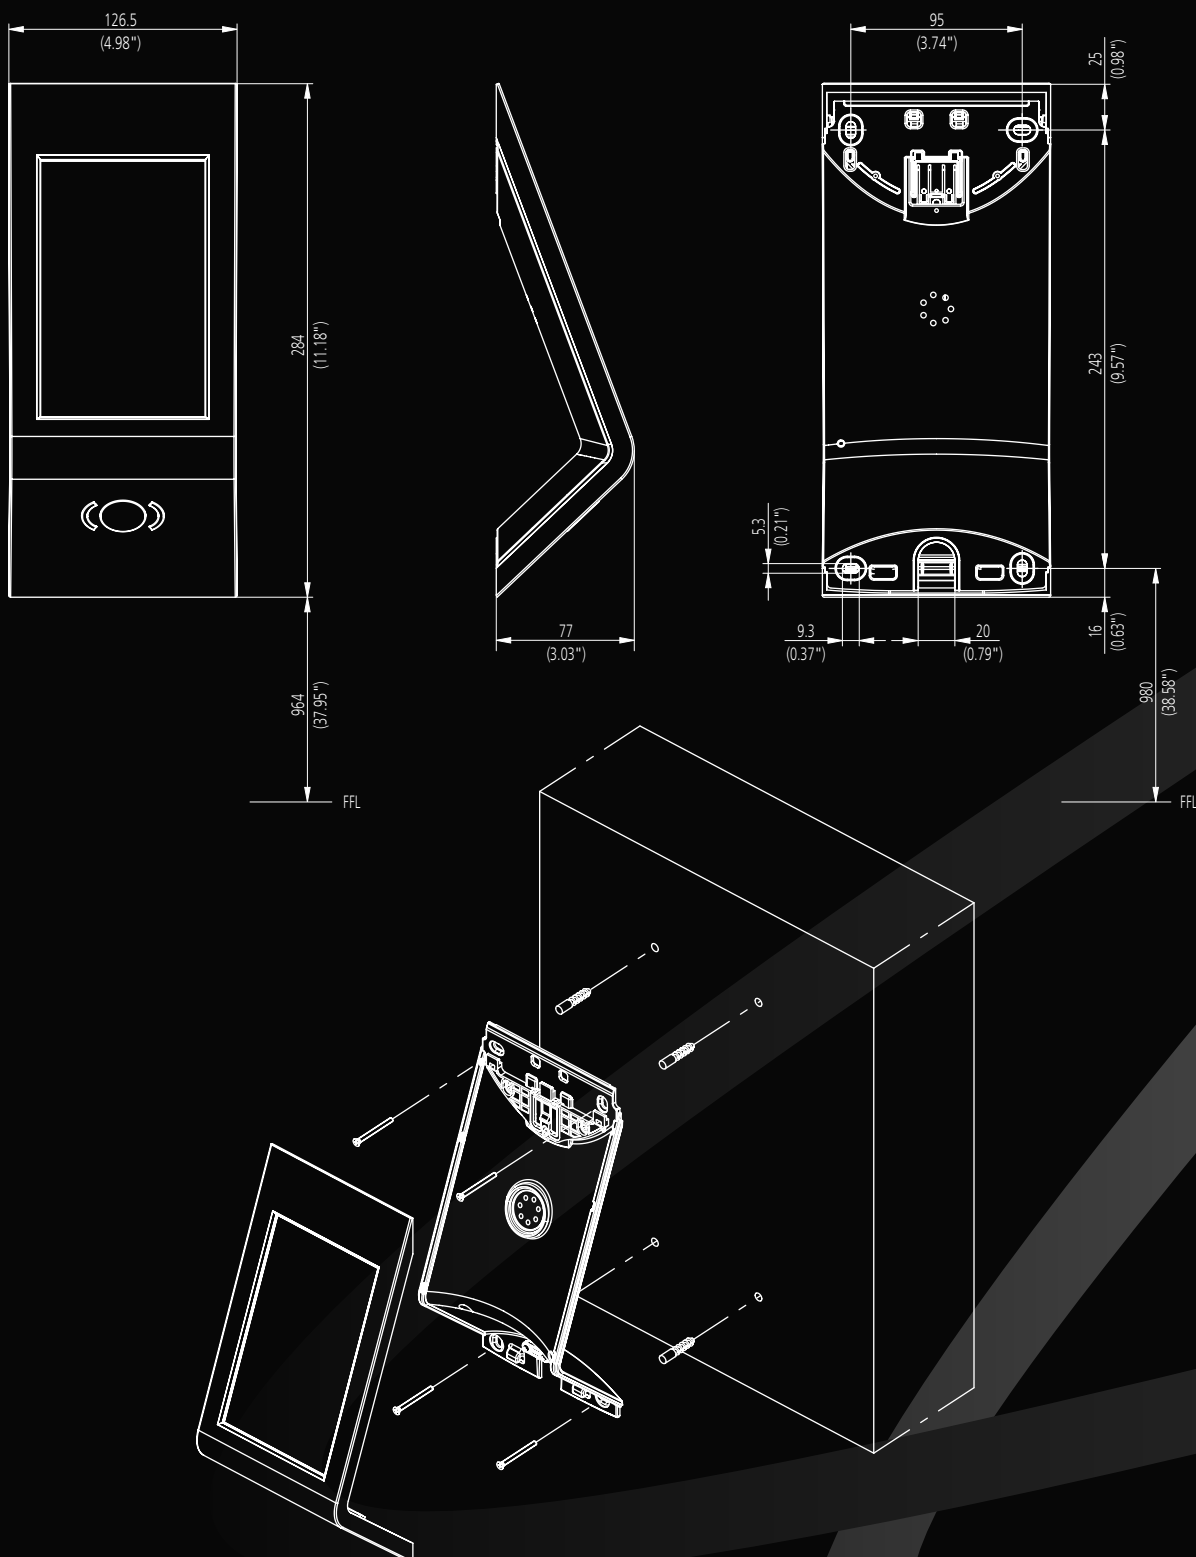

Copyright © 2011 INVENTIO AG  
 Note: all data is for guidance only & is subject to changes without notice. 59903121. Version 1

For further information including location of the Schindler office nearest you, please visit:  
[www.schindler.com](http://www.schindler.com)

Schindler Elevator Ltd.  
 Zugerstrasse 13  
 CH-6030 Ebikon  
 Switzerland  
 Phone +41 (0)41 445 31 31  
 Fax +41 (0)41 445 52 97

porttechnology@ch.schindler.com  
[www.theporttechnology.com](http://www.theporttechnology.com)



All dimensions are in mm (inches)